

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 22 TOWNSHIP 15 RANGE 5

DATE: 6-25-02 8-1-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 1-23-97


IN. S.P.C. E. ZONE NAD '83

NAME: 15052203

N: 498793.3242(m)

E: 75560.0190(m)

Line of Raymond 2200 S

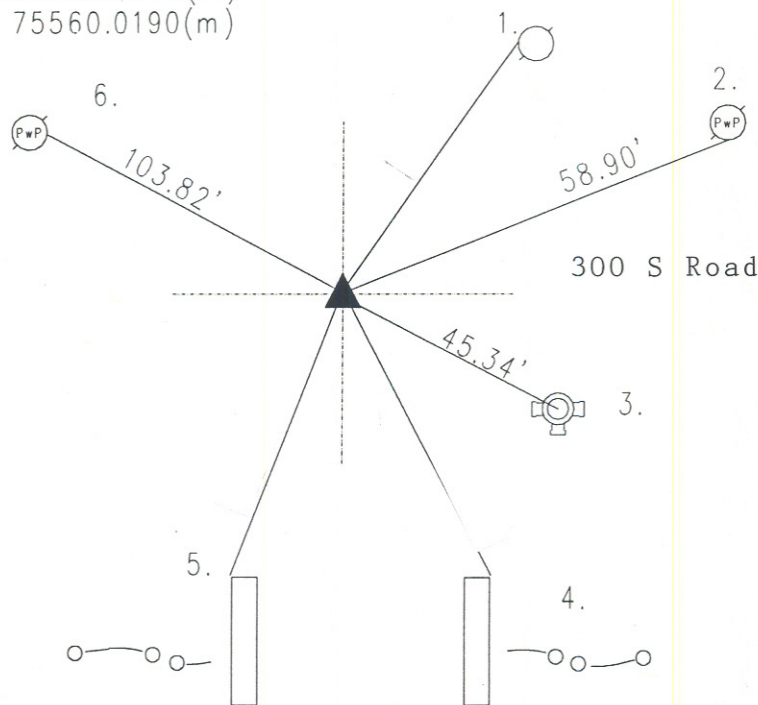

Original post set 1820 by Hendricks with witness: 12" locust N 67 W 21 links; 10" buckeye E 22 links per Marion County Atlas pg. 14. Hosbrook 9-7-1852 called stone with witnesses: 28" walnut S 56 1/2 W 39 links, 15" elm S 64 E 69 links per Warren Township Legal Survey Book pg. 30. Coyner 5-14-1860 called stone witnesses: 24" elm S 35 W 80.8', 12" buckeye S 24 1/2 W 104'; 30" maple S 17 1/2 W 95.8' per Warren Township Legal Survey Bk. 37. 10-49 called stone with cut 'x'. 3-8-63 called pipeover stone. 2-4-69 called bolt at surface. Excavated 7-10-85 brass plug 2" down. Pipe 10" down. Lathe 18" down. Stone 24" down. Harrison set. Re-tied 1-23-97 with Wilcoxon. Re-tied 6-25-02 by Wilcoxon. 15052203

REF.	DISTANCE	DESCRIPTION
1.	64.72'	Railroad spike w/tag W DNR Mar/Han Z 1993
2.	58.90'	PK nail S PwP#268-367 12"up
3.	45.34'	Top nut of fire hydrant
4.	68.94'	Mag nail w/bw top wooden guard rail post
5.	79.67'	Mag nail w/bw top wooden guard rail post
6.	103.82'	PK nail E guide pole 14"up